

Crystal Tourniket



투명 회전문

Crystal Tourniket은 적층 유리와 강화 유리를 결합하여 전통적인 회전문의 프레임 요소들을 최소한으로 사용되었습니다. 그 결과, 현대식 커튼을 뿐만 아니라 고전적인 건축 양식과도 아름답게 어우러지는 투명한 회전문이 탄생했습니다.

스타일리쉬 하고 기능적인

Crystal Tourniket은 3개 또는 4개의 도어 날개로 구성되며, 광범위한 사이즈로 적용 가능합니다. 수동 또는 자동 작동, 투명 또는 색조 유리, 그리고 Night Lockding Doors 옵션선택이 가능한 Crystal Tourniket 은 스타일리쉬함과 기능적인 면을 동시에 충족하는 진정한 다목적 출입문입니다.

다목적 출입문 솔루션

다양한 구성을 통해 Crystal Tournicket은 호텔, 오피스건물과 같은 중간 규모의 통행량을 가진 여러 유형의 건물에 적용하기에 완벽한 선택입니다.


The 3-wing Crystal Tourniket

The Crystal Tourniket is available in a wide range of sizes with 3-wing doors offering larger segments, while 4-wing models provide wider throat openings and slightly smaller segments.

<i>D</i> Diameter (mm)	<i>C</i> Throat opening (mm)	<i>E</i> Installation width (mm)	Max persons / segment	Capacity/ minute ¹	Type of traffic	Escape route ²	Disabled access
3-wing Crystal Tourniket							
1600	700	1650	1	2 x 22		-	-
1800	800	1850	1	2 x 22		-	-
2000	900	2050	1	2 x 22		-	-
2200	1000	2250	1	2 x 20			-
2400	1100	2450	1	2 x 18			-
2600	1200	2650	2	2 x 33			-
2800	1300	2850	2	2 x 31			-
3000	1400	3050	2	2 x 29			-

¹ Maximum capacity per minute indicates how many people can pass through the Crystal Tourniket in both directions under normal conditions.

² Only with collapsible door set (Subject to local regulations).

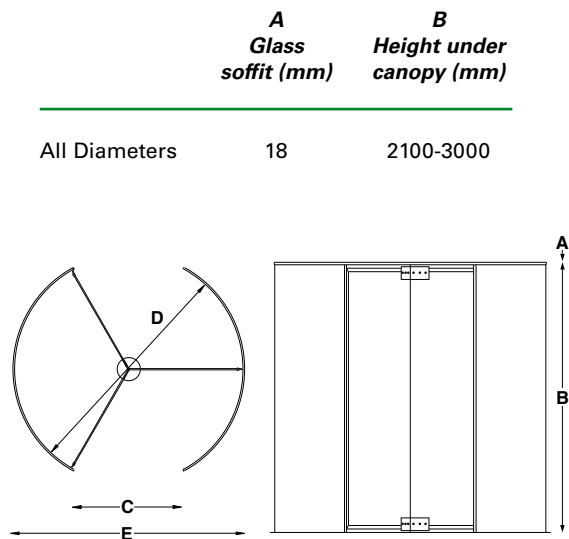


The 4-wing Crystal Tourniket

D Diameter (mm)	C Throat opening (mm)	E Installation width (mm)	Max persons / segment	Capacity/ minute¹	Type of traffic	Escape route²	Disabled access
4-wing Crystal Tourniket							
1600	1055	1650	1	2 x 26		-	-
1800	1195	1850	1	2 x 26		-	-
2000	1335	2050	1	2 x 26		-	-
2200	1475	2250	1	2 x 26			-
2400	1615	2450	1	2 x 24			-
2600	1755	2650	1	2 x 22			-
2800	1895	2850	1	2 x 20			-
3000	2035	3050	2	2 x 38			-

¹ Maximum capacity per minute indicates how many people can pass through the Crystal Tourniket in both directions under normal conditions.

² Only with collapsible door set (Subject to local regulations).

	A Glass soffit (mm)	B Height under canopy (mm)
All Diameters	18	2100-3000

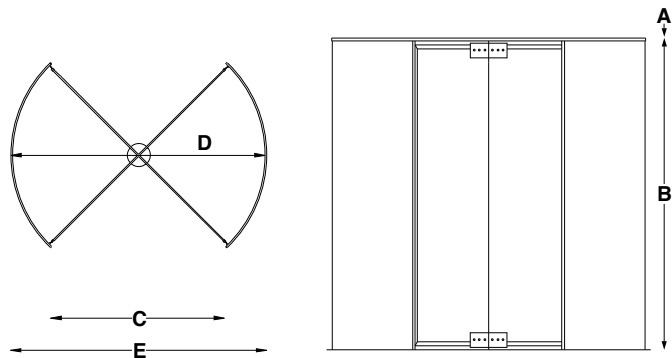

Technical specifications

Power supply	200-240 VAC, 50/60 Hz
Motor	AC motor, 3-phase
Power consumption	
Operating	150W
Sationary	75W
Ambient temperature	-20°C to +50°C
Fuse	External power supply fused with 16 A Slow

High quality

At Boon Edam, we take quality seriously. Quality of the materials we use, quality of our employees as well as our partners. As with all Boon-Edam products, the Crystal Tourniket is manufactured to the highest standards, is CE approved and complies with the Machine Directive (98/37/EEC), the EMC-Directive (89/336/EEC) and the Low Voltage Directive (93/68/EEC).

Distributor